


ALIKLER G2

AGRI & FOOD
Foodstuff transfer

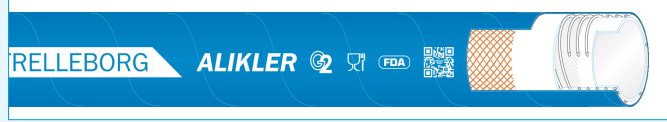

Applications

Suction and discharge of liquid foodstuffs such as wine, beer, milk, oil, fats, cider, fruit juice, and alcohol up to 96 %.
For unloading bays, processing and filling plants, and liquid foodstuff tankers. Additional air line on road tankers carrying bulk powdered products (not compressor line) at temperatures up to + 120 °C.

Advantages

- n Improved flexibility, very easy to handle.
- n A smooth, seamless, white, multipurpose food grade tube that does not propagate bacterial growth.
- n Excellent resistance to kinking.
- n Changes in temperature have little effect due to the qualities of the rubber compound.
- n Resistant to most cleaning processes used in the food industry, either with chemicals (max. 90 °C) or steam (max. 130 °C). See our users information leaflet.
- n Non-marking, abrasion-resistant cover.
- n Contains no phthalate.

Technical description

Inner tube: food grade quality oil resistant NBR, white, smooth.
Reinforcement: synthetic textile with embedded steel helix.
Cover: oil and weather resistant NBR/PVC, blue, fabric impression.
Temperature range: -30 °C to +100 °C.
Standard/Approval:
EU regulations N. 1935/2004 and 2023/2006.
FDA regulation 21 CFR 177.2600.
German legislation: BfR recommendation XXI cat. 2.
French legislation.
All relevant migrations tests (France and FDA) were performed and confirmed compliant by the French institute of Poitiers (IANESCO).

Couplings/Fittings

Specially designed fittings are available, please contact us for further information in order to get optimum connections.

ALIKLER G2

29/01/2014

ID mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m	
25	-0/+1 37	±1.0	10	30	0.9	40	0.92	20	5513357	n
								40	5513358	n
32	-0/+1 44	±1.0	10	30	0.9	55	1.1	20	5513359	n
								40	5513360	n
38	-0/+1 50	±1.0	10	30	0.9	65	1.26	20	5513361	n
								40	5513362	n
45	-0/+1 57	±1.0	10	30	0.9	90	1.45	20	5513363	120
								40	5513364	120
50	-0/+1 62	±1.5	10	30	0.9	100	1.77	20	5513365	n
								40	5513366	n
								20	5513383	400
	65	±1.5						40	5513384	400
53	-0/+1 65	±1.5	10	30	0.9	110	1.86	20	5513367	n
								40	5513368	n
63	-0/+1 76	±1.5	10	30	0.9	135	2.24	20	5513369	n
								40	5513370	n
70	-0/+1 84.5	±1.5	10	30	0.9	175	3.07	20	5513371	120
								40	5513372	120
75	-0/+1 89.5	±1.5	10	30	0.9	190	3.29	20	5513373	n
								40	5513374	n
								20	5513385	200
	91	±1.5						40	5513386	200
89	-0/+1 104.5	±1.5	10	30	0.9	275	3.89	20	5513375	80
								40	5513376	80
100	-0/+1 115.5	±1.5	10	30	0.9	400	4.4	20	5513377	n
								40	5513378	n
125	-0/+1 145.5	±2.0	10	30	0.9	600	6.74	10	5513379	n
								20	5513380	n
150	-0/+1 171.5	±2.0	10	30	0.9	700	8.35	10	5513381	n
								20	5513382	n



ALIKLER G2

29/01/2014

ID mm	OD mm	Working pressure bar	Bursting pressure bar	Max. vacuum bar	Bending radius mm	Weight kg/m	Length m	Article number	Stock (n) or min. order m
----------	----------	----------------------------	-----------------------------	--------------------	----------------------	----------------	-------------	----------------	---------------------------------

Branding



and embossed: TRELLEBORG - ALIKLER G2 - ND - WP 10 bar - week/year - batch number - Made in France

