


TRICOFLEX

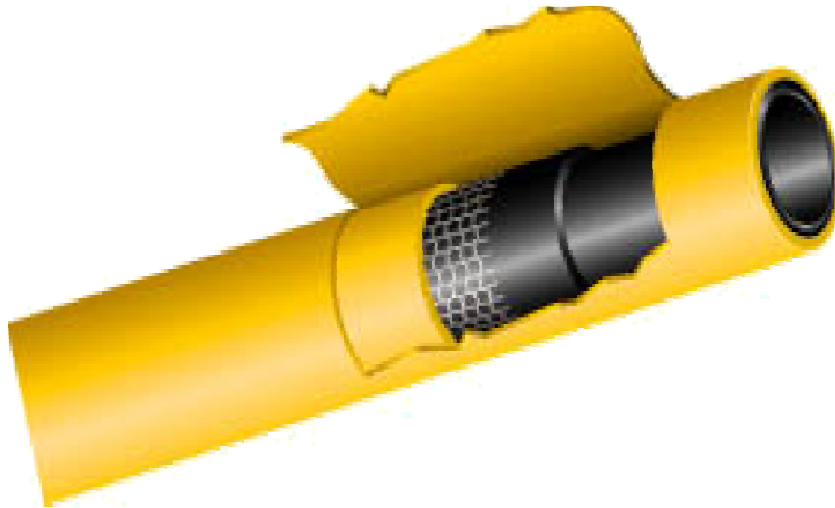

Tricoflex

Vörunúmer	Innanmál	Utanmál	Þyngd	V.Prýstingur	B.radius
	mm.	mm.	g/m	bar	mm
20-10-125175	12,5	17,5	148	10	80
20-10-150205	15,0	20,5	200	10	145
20-10-190255	19,0	25,5	293	10	275
20-10-250325	25,0	32,5	425	10	230
20-10-300390	30,0	39,0	612	10	230
20-10-350450	35,0	45,0	755	10	300
20-10-400510	40,0	51,0	937	10	500
20-10-500530	50,0	63,0	1370	10	600

Alhliða sterk vatnsslanga fyrir garð og iðnað. Ytra lag er hannað til að þola álag og útfjólubláa geisla. Er mjúk, sveigjanleg og leiðnifrí.

Hitapol: -15°C + 65°C

Innra lag: Gult slétt PVC

Ytra lag: Svart slétt PVC

Styrking : Polyester strigi

