
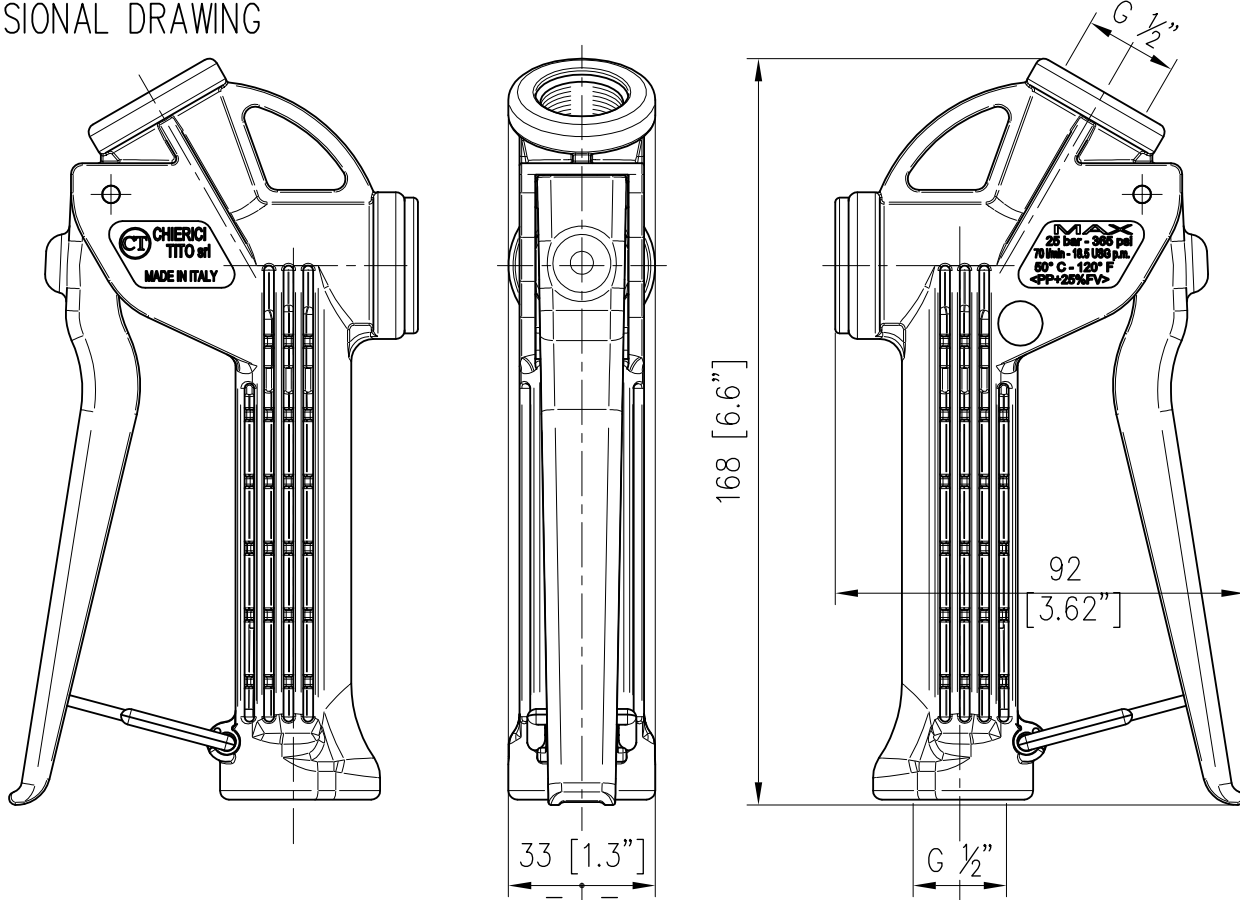


	EQUIPAGGIAMENTI TECNICI LAVAGGIO	UNIVERSAL GUN	24/05/11 GB
<u>RED TRIGGER P/N 15.0003.11</u> FEATURES: * Body and sealing seat in polypropylene reinforced with fiberglass. * Pin in polypropylene reinforced with fiberglass. * Seal obtained by ball in tempered stainless steel AISI 420 and spring in stainless steel AISI 302 * Seals in NBR * Rear fluid entry * Inlet / Outlet G 1/2 F * Max Pressure 25bar – 2.5Mpa (363psi) * Max Flow rate 70 l/min (18.5 USGp.m.) * Max temperature 50°C (120° F) * Weight 131 gr (4.62 oz.)	<u>BLUE TRIGGER P/N 15.0003.12</u> FEATURES: * Body and sealing seat in polypropylene reinforced with fiberglass * Pin in stainless steel AISI 303 * Seal obtained by ball in tempered stainless steel AISI 420 and spring in stainless steel AISI 302 * Seals in VITON * Rear fluid entry * Inlet / Outlet G 1/2 F * Max Pressure 25bar – 2.5Mpa (363psi) * Max Flow rate 70 l/min (18.5 USGp.m.) * Max temperature 50°C (120° F) * Weight 131 gr (4.62 oz.)	<u>GREY TRIGGER P/N 15.0013.12</u> FEATURES: * Body and sealing seat in polypropylene reinforced with fiberglass * Pin in stainless steel AISI 316 * Seal obtained by ball in stainless steel AISI 316 and spring in stainless steel AISI 316 * Seals in VITON * Rear fluid entry * Inlet / Outlet G 1/2 F * Max Pressure 25bar – 2.5Mpa (363psi) * Max Flow rate 70 l/min (18.5 USGp.m.) * Max temperature 50°C (120° F) * Weight 131 gr (4.62 oz.)	<u>BROWN TRIGGER P/N 15.0015.12</u> FEATURES: * Body and sealing seat in polypropylene reinforced with stapled fiberglass * Pin in stainless steel AISI 316 * Seal obtained by ball in stainless steel AISI 316 and spring in stainless steel AISI 316 * Seals in VITON * Rear fluid entry * Inlet / Outlet G 1/2 F * Max Pressure 25bar – 2.5Mpa (363psi) * Max Flow rate 70 l/min (18.5 USGp.m.) * Max temperature 50°C (120° F) * Weight 131 gr (4.62 oz.)
<u>GREEN TRIGGER P/N 15.0014.12</u> FEATURES: * <u>The gun always leaks a small quantity of fluid</u> Pressure loss: 2.8bar – 0.3Mpa (40psi) equal to 1–1.3 l/min 0.3 USGp.m. * Body and sealing seat in polypropylene reinforced with fiberglass * Pin in stainless steel AISI 316 * Seal obtained by ball in stainless steel AISI 316 and spring in stainless steel AISI 316 * Seals in VITON * Rear fluid entry * Inlet / Outlet G 1/2 F * Max Pressure 25bar – 2.5Mpa (363psi) * Max Flow rate 70 l/min (18.5 USGp.m.) * Max temperature 50°C (120° F) * Weight 131 gr (4.62 oz.)	<u>YELLOW TRIGGER P/N 15.0003.10</u> FEATURES: * Body and sealing seat in polyamide reinforced with fiberglass * Pin in stainless steel AISI 303 * Seal obtained by ball in tempered stainless steel AISI 420 and spring in stainless steel AISI 302 * Seals in VITON * Rear fluid entry * Inlet / Outlet G 1/2 F * Max Pressure 60bar – 6Mpa (870psi) * Max Flow rate 70 l/min (18.5 USGp.m.) * Max temperature 60°C (140° F) * Weight 162 gr (5.7 oz.)	DIMENSIONAL DRAWING 	

15.0003.10 CP12-06 sp. gun, yellow trigger
15.0003.11 CP12-02 sp.gun red trigger

15.0003.12 CP12-00 sp. gun, blue trigger
15.0013.12 CP12-04 sp. gun, grey trigger

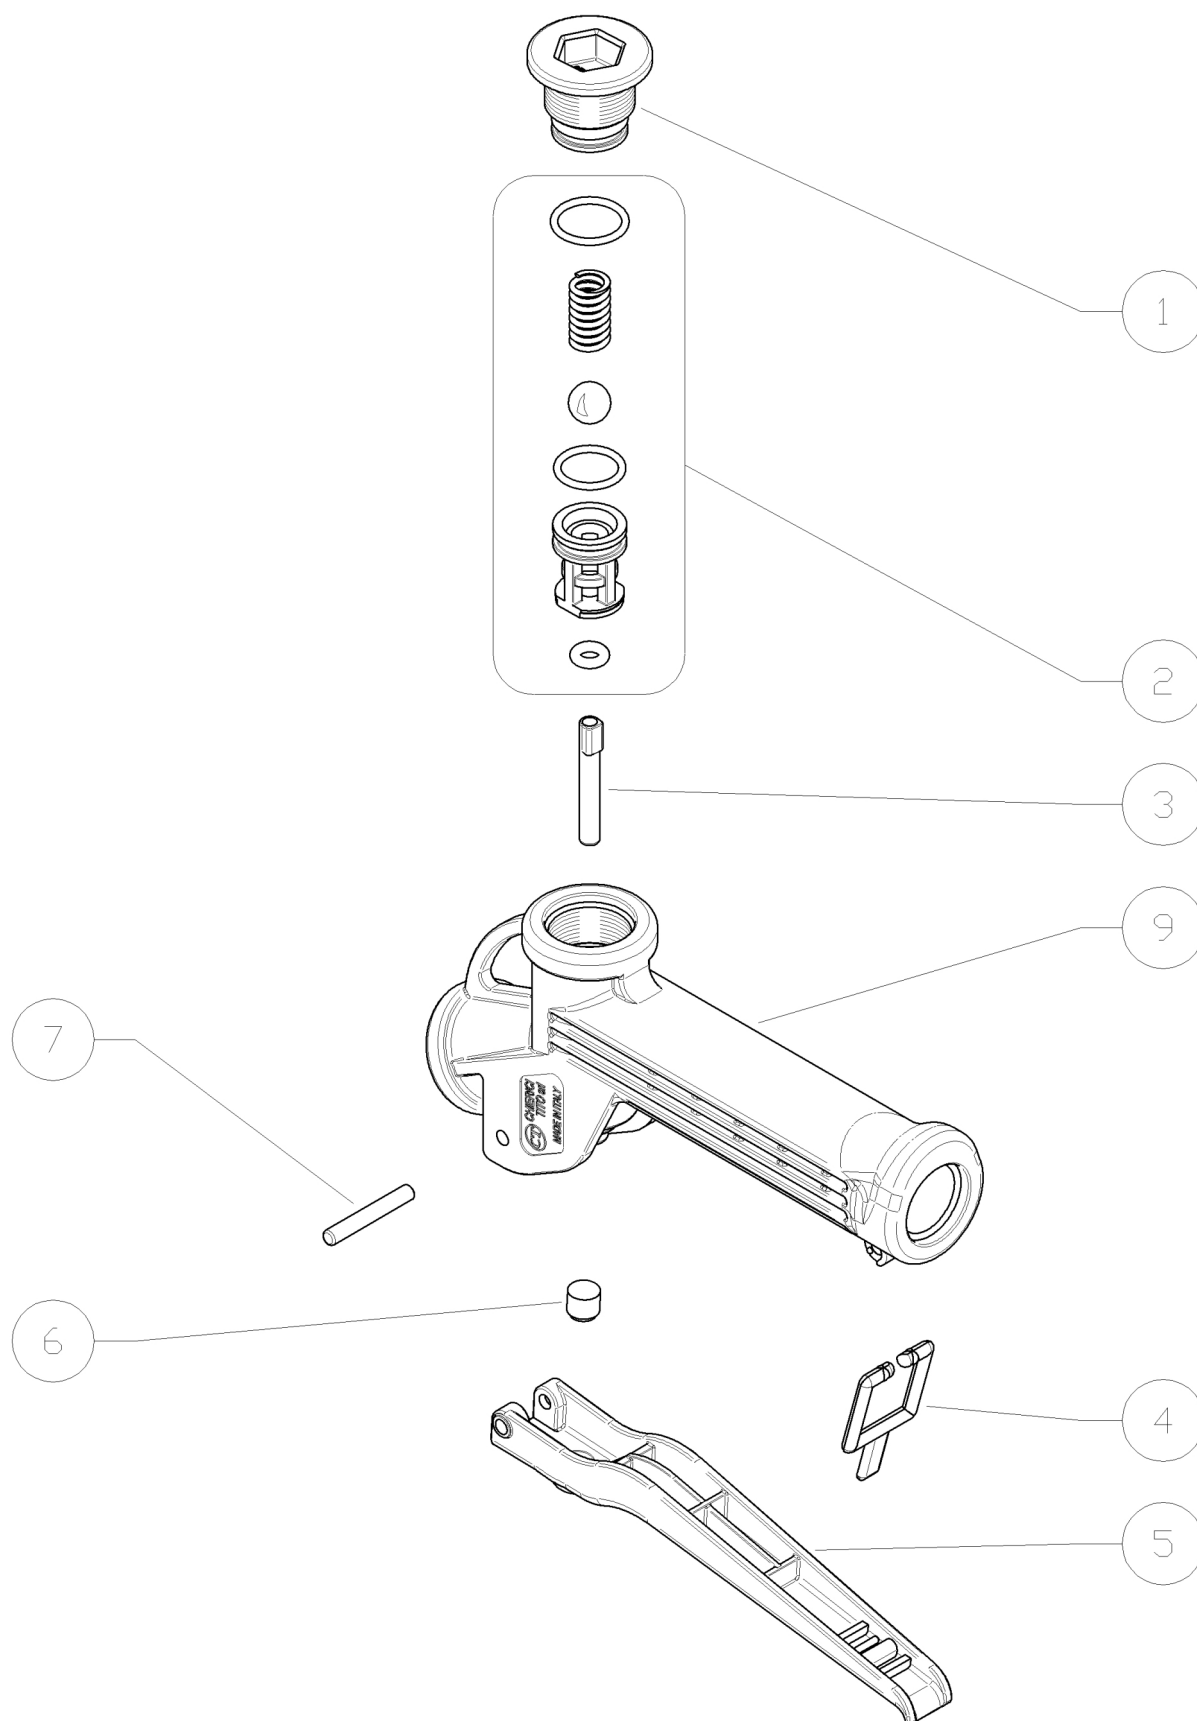

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4	
1	13.0003.24	Plug -Universal, PP black	1					5
1	13.0003.39	Plug -Universal gun, Pa6 (1)	1					5
2	99.0003.04	Spares kit,Universal gun, blue trigger (2)	1					1
2	99.0003.16	Spares kit -Universal gun, yellow trigger (1)	1					1
2	99.0003.03	Spares kit,Universal gun, red trigger (3)	1					1
2	99.0003.13	Spares kit,Universal gun, grey trigger (4)	1					1
3	12.0050.08	Parallel pin, 5x36 mm Sst.	1					5
3	13.0003.55	Parallel pin, 5x36 mm PP (3)	1					5
3	12.0050.18	Parallel pin, 5x36 mm Sst.316 (4)	1					5

(1) 15.0003.10 (2) 15.0003.12 (3) 15.0003.11 (4) 15.0013.12

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4	
4	13.0003.30	Red safety latch, Universal gun	1					10
5	13.0003.32	Blue trigger -Universal gun (2)	1					10
5	13.0003.31	Red trigger -Universal gun (3)	1					3
5	13.0003.35	Yellow trigger -Universal gun (1)	1					3
5	13.0003.36	Gray trigger -Universal gun (4)	1					3
6	13.0003.28	Stop pin, 8x7 mm	1					5
7	12.0050.21	Parallel pin, 4x28 mm	1					5
9	13.0003.11	Casing -Universal gun, PP	1					10
9	13.0003.27	Casing -Universal gun, Pa6 (1)	1					10

P.A. SpA EQUIPAGGIAMENTI TECNICI DEL LAVAGGIO

Via Milano, 13 42048 Rubiera - (RE) ITALY

Tel +39 0522 623611 (ric aut) - Fax +39 0522 629600

Info@pa-etl.it - www.pa-etl.it

**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =**